


SOLYX®

SX-316132 Frosted Stripes - Vertical

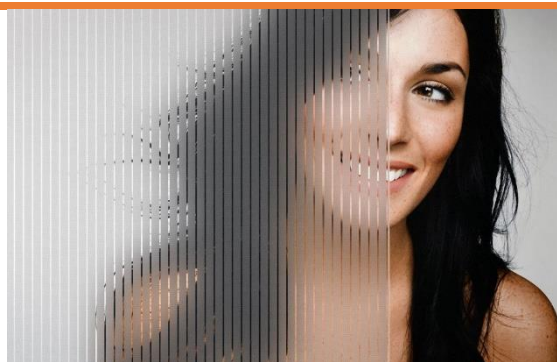

Product Details

SX-316132 Frosted Stripes Window Film. Great film for subtle privacy. 3/16" stripes with 1/32" clear space. Stripes run vertically down length of roll.

Flammability Rating

This product meets **Class B, s1, d0**, as specified in **BS EN 13501-1:2018**.

When applied to surfaces- glass or plastic sheet:
Horizontal Burn (Flame Spread) ASTM D-635 inch Less than 1.0

UL 94 Rating UL 94 UL Classification V-O Class A 0 -25 Flame Spread Index 0 -450 Smoke Developed Index

SOLYX Films are suitable for installation onto fire rated glass and will not affect the rating of fire rated glass.

Specification

Product Code	SX-316132
Film Type	Polyester
Adhesive Type	Pressure-sensitive
Usage	Interior
Available Roll Width(s)	48"
Thickness	51 micron
Visible Light Transmission	75%
UV Transmission	2%
Shading Coefficient	0.55
Total Solar energy Rejected	38%
Solar Energy Absorbed	25%

Installation & Warranty

Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same methods used for installing window films.

Warranty

This product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

Product Construction

Face Film

51 micron SOLYX polyester

Adhesive

Clear, Pressure-sensitive, removable

Release Liner

Silicone

Distribution & Contact Information

Solyx® Decorative Films are available through authorised window film installers and signage companies, or directly from Glass Films.

Contact Information

Glass Films

Tel: +44 (0) 800 970 6366

Email: sales@glassfilms.eu

Web: www.glassfilms.eu