


SOLYX®

SXWF-SSO Satin Silver Opaque

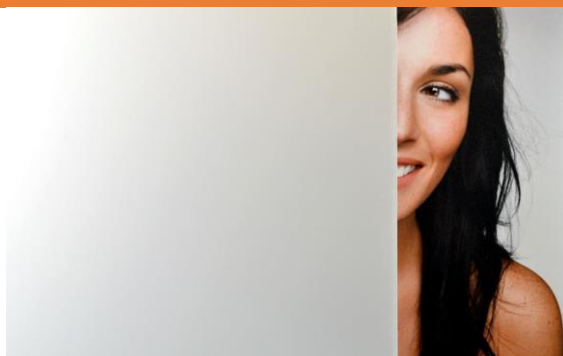

Product Details

SXWF-SSO Satin Silver Opaque. Satin Silver opaque polyester. Easy to install. Matches Natural Anodized Aluminium. 95% Light block. Zero visibility. The front surface of this film has a light white/silver matt satin finish. The adhesive side has a metalized silver finish.

Flammability Rating

This product meets **Class B, s1, d0**, as specified in **BS EN 13501-1:2018**.

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

Specification

| | |
|-----------------------------|----------------------|
| Product Code | SXWF-SSO |
| Film Type | Polyester |
| Adhesive Type | Pressure-sensitive |
| Usage | Interior or Exterior |
| Available Roll Width(s) | 60" |
| Thickness | 102 micron |
| Visible Light Transmission | 0% |
| UV Transmission | 0% |
| Total Solar Absorbance | 35% |
| Total Solar Reflectance | 48% |
| Glare Reduction | 92% |
| Total Solar Energy Rejected | 66% |
| Shading Coefficient | 0.24 |

Installation & Warranty

Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same methods used for installing window films.

Warranty

This product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. Exterior applications have a three (3) year warranty. See warranty information for specific details.

Product Construction

Face Film

102 micron Polyester

Adhesive

Clear, Pressure-sensitive

Release Liner

Silicone Coated

Distribution & Contact Information

Solyx® Decorative Films are available through authorised window film installers and signage companies, or directly from Glass Films.

Contact Information

Glass Films

Tel: +44 (0) 800 970 6366

Email: sales@glassfilms.eu

Web: www.glassfilms.eu