


SOLYX®

SX-C371 Structure

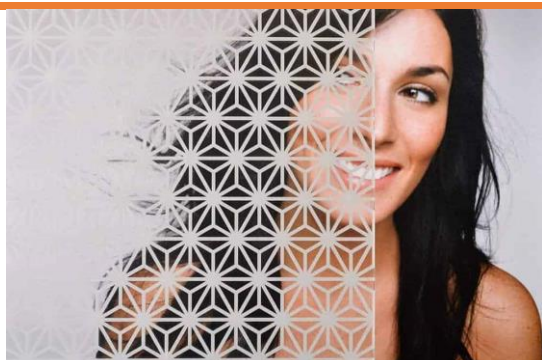

Product Details

Structure Design on optically clear window film. Ideal for semi obscuring direct visibility while providing a sense of openness.

Flammability Rating

This product meets **Class B, s1, d0**, as specified in **BS EN 13501-1:2018**.

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

Specification

Product Code	SX-C371
Film Type	Polyester
Adhesive Type	Pressure-sensitive
Usage	Interior
Available Roll Width(s)	48"
Thickness	50 micron
Shading Coefficient	0.93%
Visible Light Reflection	70%
Visible Light Transmission	56%
UV Transmission	21%
Infra-Red Transmission	63%
Solar Heat Reflection	7%
Solar Heat Transmission	76%

Installation & Warranty

Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same methods used for installing window films.

Warranty

This product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

Product Construction

Face Film

50 micron Polyester

Adhesive

Clear, Pressure-sensitive – 0.7 – 0.87 mil

Release Liner

Silicone Coated

Distribution & Contact Information

Solyx® Decorative Films are available through authorised window film installers and signage companies, or directly from Glass Films.

Contact Information

Glass Films

Tel: +44 (0) 800 970 6366

Email: sales@glassfilms.eu

Web: www.glassfilms.eu