


SOLYX®

SX-C379 Crosshatch Etch

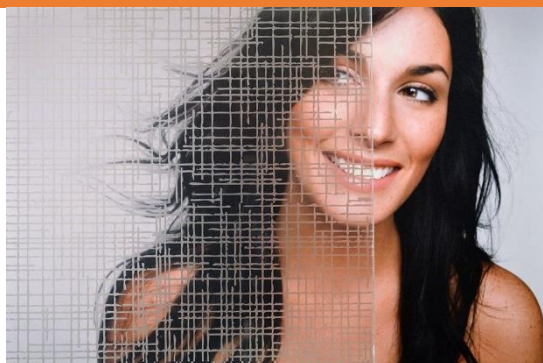

Product Details

SX-C379 Crosshatch Etch. Attractive film for semi privacy. Great distraction film for clear glass panels to prevent accident by walking into the glass.

Flammability Rating

This product meets **Class B, s1, d0**, as specified in **BS EN 13501-1:2018**.

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

Specification

Product Code	SX-C379
Film Type	PET
Adhesive Type	Pressure-sensitive
Usage	Interior
Available Roll Width(s)	48", 60"
Thickness	64 micron
Visible Light Transmission	79%
UV Transmission	73%
Infra-Red Transmission	78%
Total Solar Energy Rejected	28%

Installation & Warranty

Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same methods used for installing window films.

Warranty

This product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

Product Construction

Face Film

64 micron PET

Adhesive

Clear, Pressure-sensitive

Release Liner

Silicone Coated

Distribution & Contact Information

Solyx® Decorative Films are available through authorised window film installers and signage companies, or directly from Glass Films.

Contact Information

Glass Films

Tel: +44 (0) 800 970 6366

Email: sales@glassfilms.eu

Web: www.glassfilms.eu