


SOLYX®

SXS-M300 Brushed Metal

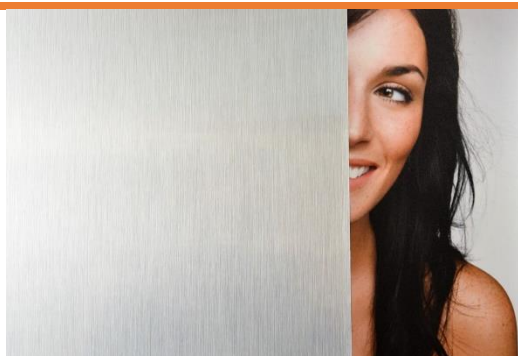

Product Details

SXS-M300 Brushed Metal Laser cut metalized polyester. Exact simulation of brushed aluminium or stainless-steel sheet. Opaque. Ideal for obscuring view or as a decorative coating under glass counter tops, glass partitions or plastic columns.

Flammability Rating

This product meets **Class B, s1, d0**, as specified in **BS EN 13501-1:2018**.

Horizontal Burn (Flame Spread) ASTM D-635 inch
Less than 1.0
UL 94 Rating UL 94 UL Classification V-O
Class A 0 -25 Flame Spread Index 0 -450 Smoke
Developed Index

Specification

Product Code	SXS-M300
Film Type	Polyester
Adhesive Type	Pressure-sensitive
Usage	Interior or Exterior
Available Roll Width(s)	54"
Thickness	152 micron
Shading Coefficient	0.24
Visible Light Transmission	Less than 5%
UV Rejection	100%
Total Solar Reflectance	75%
Total Solar Absorbance	38%
Glare Reduction	98%
Total Solar Energy Rejected	82%

Installation & Warranty

Installation

Installation should be in accordance with the manufacturer's installation instructions. This film is applied using the same methods used for installing window films.

Warranty

This product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

Product Construction

Face Film

51 micron Polyester

Adhesive

Clear, Pressure-sensitive

Release Liner

Silicone

Distribution & Contact Information

Solyx® Decorative Films are available through authorised window film installers and signage companies, or directly from Glass Films.

Contact Information

Glass Films

Tel: +44 (0) 800 970 6366

Email: sales@glassfilms.eu

Web: www.glassfilms.eu