Specification Sheet

SOLYX®

SX-1212 Wire Glass

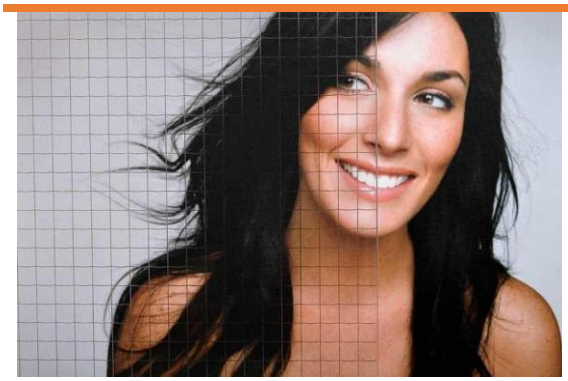

Product Details

SX-1212 Wire Glass is a transparent polyester film with a decorative 1/2" square design simulating wire encapsulated safety glass. This film has a scratch-resistant coating; a solvent-based, acrylic, pressure-sensitive adhesive; and a 25 micron polyester liner.

Flammability Rating

This product meets **Class B, s1, d0,** as specified in **BS EN 13501-1:2018.**

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

Specification

Product Code	SX-1212
Film Type	Polyester
Adhesive Type	Pressure-sensitive
Usage	Interior
Available Roll Width(s)	59”
Thickness	100 micron
Visible Light Transmission	82%
UV Transmission	<1%
Infra-Red Transmission	90%

Installation & Warranty

Installation

Installation should be in accordance with the manufacturer’s installation instructions. This film is applied using the same methods used for installing window films.

Warranty

This product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

To ensure that **Genuine Solyx®** products have been installed, proof of a valid invoice number is required to validate your warranty. Scan the QR code below or visit www.glassfilms.eu/validate to validate.

Product Construction

Face Film

100 micron Polyester

Adhesive

Solvent-Based Clear Acrylic, Pressure-Sensitive

Release Liner

25 micron Polyester

Distribution & Contact Information

Solyx® Decorative Films are available through authorised window film installers and signage companies, or directly from Glass Films.

Contact Information

Glass Films

Tel: +44 (0) 800 970 6366
Email: sales@glassfilms.eu
Web: www.glassfilms.eu

Solyx® & Simglas® are trademarks of Decorative Films LLC. © Glass Films 2022, All Rights Reserved.