
Specification Sheet

SOLYX®

SXJ-0583 TruEtch Dual Dot Gradient

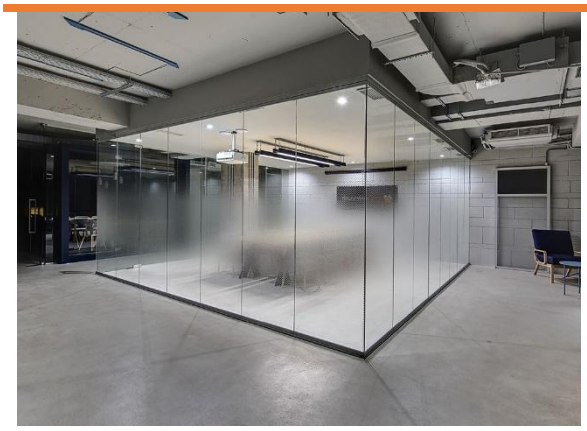

Product Details

SXJ-0583 TruEtch Dual Dot Gradient. Gradation is from solid translucent etch to clear in a dot formation; a dual direction fade composed of dots. Translucent in the middle, fading out to clear. Designed for eye-level semi-privacy.

Flammability Rating

This product meets **Class B, s1, d0,** as specified in **BS EN 13501-1:2018.**

This product meets ASTM E84 and is classified as Class A as defined in NFPA 101, Life Safety Code®.

Specification

Product Code	SXJ-0583
Film Type	Polyester
Adhesive Type	Pressure-sensitive
Usage	Interior
Available Roll Width(s)	60”
Thickness	50 micron
Shading Coefficient	0.55%
Visible Light Reflection	27%
Visible Light Transmission	46%
UV Transmission	2%
Infra-Red Transmission	70%
Total Solar energy Rejected	38%
Solar Energy Absorbed	25%

Installation & Warranty

Installation

Installation should be in accordance with the manufacturer’s installation instructions. This film is applied using the same methods used for installing window films.

Warranty

This product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details.

To ensure that **Genuine Solyx®** products have been installed, proof of a valid invoice number is required to validate your warranty. Scan the QR code below or visit www.glassfilms.eu/validate to validate.

Product Construction

Face Film

50 micron Polyester

Adhesive

Clear, Pressure-Sensitive

Release Liner

Silicone Coated

Distribution & Contact Information

Solyx® Decorative Films are available through authorised window film installers and signage companies, or directly from Glass Films.

Contact Information

Glass Films

Tel: +44 (0) 800 970 6366
Email: sales@glassfilms.eu
Web: www.glassfilms.eu

Solyx® & Simglas® are trademarks of Decorative Films LLC. © Glass Films 2022, All Rights Reserved.